


CURTIS 38000 SERIES BARRIER TYPE 12 POLE TERMINAL WITH 6-32 SCREWS  
 TERMINAL BLOCK COVER OPTIONAL

0.213" DIA MOUNTING HOLES 4 PLCS.  
 6-32 UNC or M4 INSERTS ARE OPTIONAL

AIR FLOW →

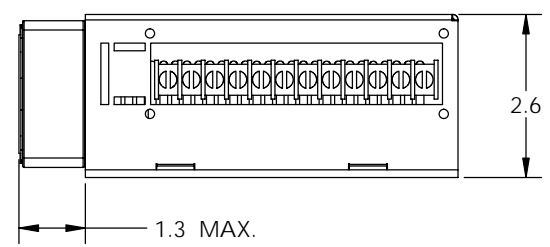

MATERIAL OF CHASSIS: ALUMINUM 5052-H32  
 FINISH: CLEAR IRIDATE AS PER MIL-C-5541E CLASS 3

REV	DESCRIPTION:	DATE	MUST BE RoHS COMPLIANT	DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMALS: XXX ± 0.008" XX ± 0.012"	THIS DOCUMENT IS THE PROPERTY OF ABSOPULSE ELECTRONICS LTD. ITS CONTENTS ARE PROPRIETARY AND MAY NEITHER BE COPIED, REPRODUCED NOR ITS CONTENTS DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN AGREEMENT FROM ABSOPULSE ELECTRONICS LTD.	Title: OUTLINE DRAWING				ABSOPULSE
A	NEW ISSUE	20/04/06				Part of: FFX PACKAGE				
			EDGES & HOLES DEBURRED SURFACES FREE OF SCRATCHES	ANGLES: ± 2° FRACTIONS: ± 1/64" UNLESS OTHERWISE STATED		Drawn by: R.N.	Checked by: T.S.	Approved by: T.S.	Revision: 1	Drawing No: ODR 980 008-A