IP66-Rated Power Supply Solutions

ABSOPULSE DO Series, up to 100W

ABSOPULSE Electronics offers a broad selection of heavy-duty power conversion products packaged in rugged, watertight die cast aluminum IP66 enclosures. The enclosures provide protection from the ingress of sand, dust, oil, salt, fog, insects and other environmental contaminants.

Output power

The D0 size IP66 enclosure accommodates any DC or AC input power converter, with power ratings up to 100W.

Typical designs

ABSOPULSE designs available in the D0 size enclosures include the DCW 30, MIW 30, MIW 50, MIW 100, and many others.

Cooling

Cooling is by internal conduction to the walls of the IP66 enclosure and by baseplate to an external chassis or cabinet wall, with additional convection via the outside surface. This enables operation within a -25°C to +55°C temperature range for full specification. Installation on a heat-sinking surface significantly improves cooling.

Ruggedizing

The internal boards are ruggedized and conformal coated for immunity to shock and vibration. Heavy ruggedizing or encapsulation are available for increased immunity.

Connectors

Options available include cable glands, sealed circular connectors, military connectors or custom.

By mounting flanges

Weight


Mounting

D0: approximately 1.2 kg; 2.6 lb Weight includes internal module

Enhancements to specifications are also available.



D0G version (IP66) Sealed cable glands.

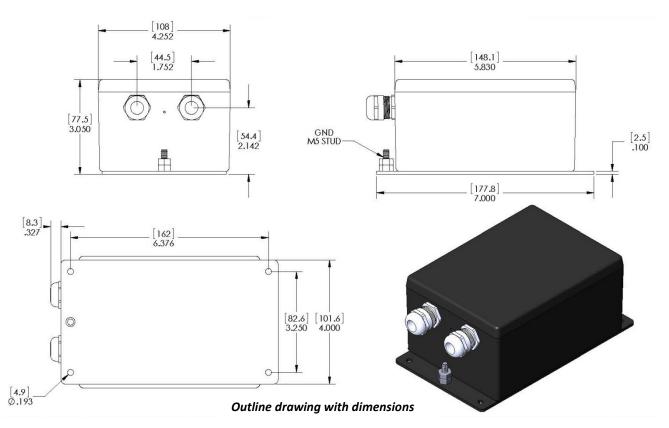

Designer and manufacturer of rugged power conversion solutions for industrial and railway applications. Our product line includes DC-DC converters, AC-DC power supplies and battery chargers, DC-AC sine wave inverters, AC-AC frequency converters, UPS systems, complete power systems in 19" and 23" racks. Custom or standard. ABSOPULSE is a BABT approved facility. Established in 1982.



ABSOPULSE ELECTRONICS LTD

110 Walgreen Road, Ottawa. Ontario | KOA 1LO | CANADA T: +1-613-836-3511 | F: +1-613-836-7488

E-mail: absopulse@absopulse.com | http